
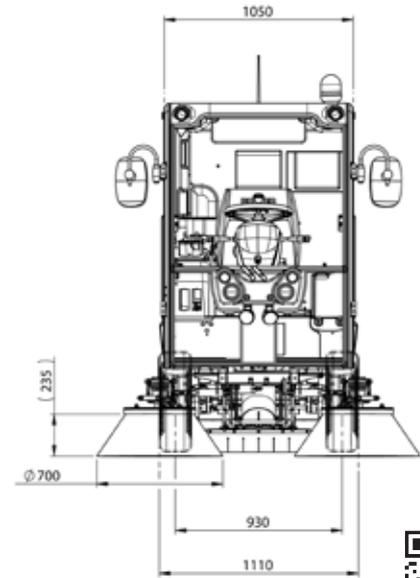


Specifications

CityCat 1000

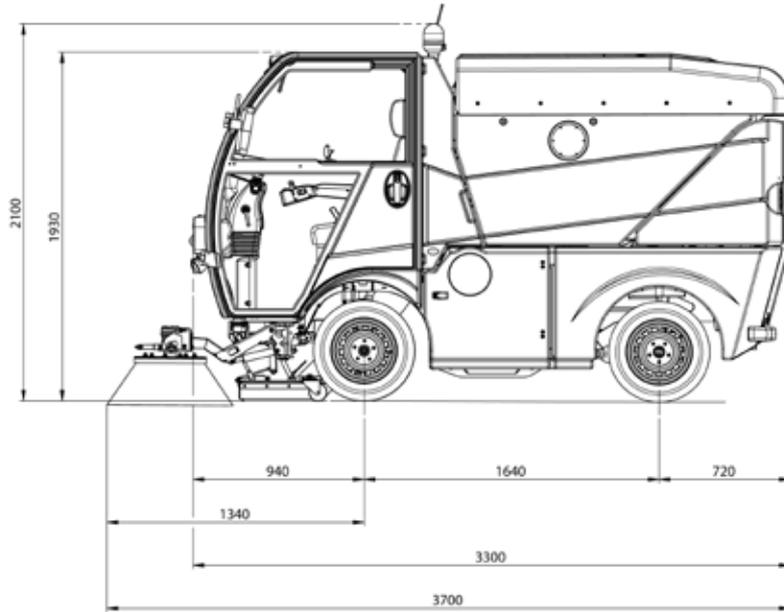

المعرفة كل جديد... اسكن الباركود
To Know All New scan that barcode

www.rem-ksa.com

Small Sweeper - CityCat 1000

Dimensions

Length	3300 mm
Length (2 brushes)	3700 mm
Width	1050 mm
Width (over wheels)	1110 mm
Height	1930 mm
Wheelbase	1640 mm
Track (front/rear)	930 mm
Sweeping path up to	2250 mm

Weight

Unladen weight w/o driver and accessories	1800 kg
Payload	600 kg
GVWR	2400 kg

Engine

Low-emission 3-cylinder Deutz D2011L03i diesel engine, Euromot III/A, 2330 cc, 31.2 kW / 43 HP @ 2300 rpm.

Fuel tank

50 l

Electrical system

12 V

Battery

74 Ah

Transmission

Infinitely variable, hydraulically controlled hydrostatic transmission.

Travel speed

Sweeping speed	0-12 km/h
Transit speed	0-25 km/h
Gradeability	25 %

Hydraulic system

Gear pump for fan drive. Gear pump for hydraulic motion control systems, steering and brush drive.

Axles and steering

Front drive axle with hydraulic differential. Load-sensing hydraulic front-wheel steering. Optional 4-wheel steering for maximum manoeuvrability and directional stability.

Brakes

Hydraulic single-circuit braking system with rear drum brakes. Parking brake on rear axle.



Wanderhose

The exceptionally lightweight flexible suction hose picks up leaves and other debris effortlessly from all those hard-to-reach areas.



Four-wheel steering

Four-wheel steering provides maximum manoeuvrability and directional stability.

Chassis

Welded chassis. Front and rear suspension. Coil spring suspension and shock absorbers on the front axle. Double cone spring rear suspension.

Tyres 165 / 70 R13C

Cab

Comfortable, soundproofed cab mounted on hydraulic mounts. Windscreen made of heat-insulating, curved, low-reflection safety glass. Electrically heated windscreen. Doors with sliding windows. Heater with multi-speed fan. Sun visor. Windscreen wiper and washer. Comfortable, fully adjustable air suspension driver's seat. Adjustable steering column.

Controls

Clearly and ergonomically arranged controls and instrumentation. Comfortable armrest with integrated controls for sweeping functions. Temperature and fluid level gauges with warning system.

Pick-up system

Suction system with suction nozzle mounted between / in front of the front wheels and high performance suction fan.

Hopper

Chromium steel hopper, capacity 1³m
hydraulic tipping
Dump height up to 1350 mm
Dump width 990 mm

Water system

Clean water tank 220 l
Water recirculation system in the hopper for an additional 70 l

Electrically controlled water pump for water spray jets.

Brushes

2 brushes Ø 700 mm
Infinitely variable speed control 0-100 rpm

Infinitely variable hydraulic brush pressure adjustment.



شركة مصنع آليات النظافة
Refuse Equipment MFG. Co.

